

Series UT™

Residential Condensing
Gas Tankless Water Heater



PAVILION™

Tankless Water Heaters




FEATURES

- Top mounted connections
- High quality dual stainless steel heat exchangers
- Ultra-low NOx (<20ppm)
- Versatile venting options
- 18-year limited heat exchanger warranty for residential use and 5-year limited parts warranty

Series UT™ Standard Equipment

- Best in class Uniform Energy Factor (UEF), 0.97
- Top mounted connections for faster, easier installations
- Temperature controls, including remote thermostat
- Direct electronic ignition
- Easiest replacement for tank water heater
- Durable stainless steel heat exchangers


Dimensions

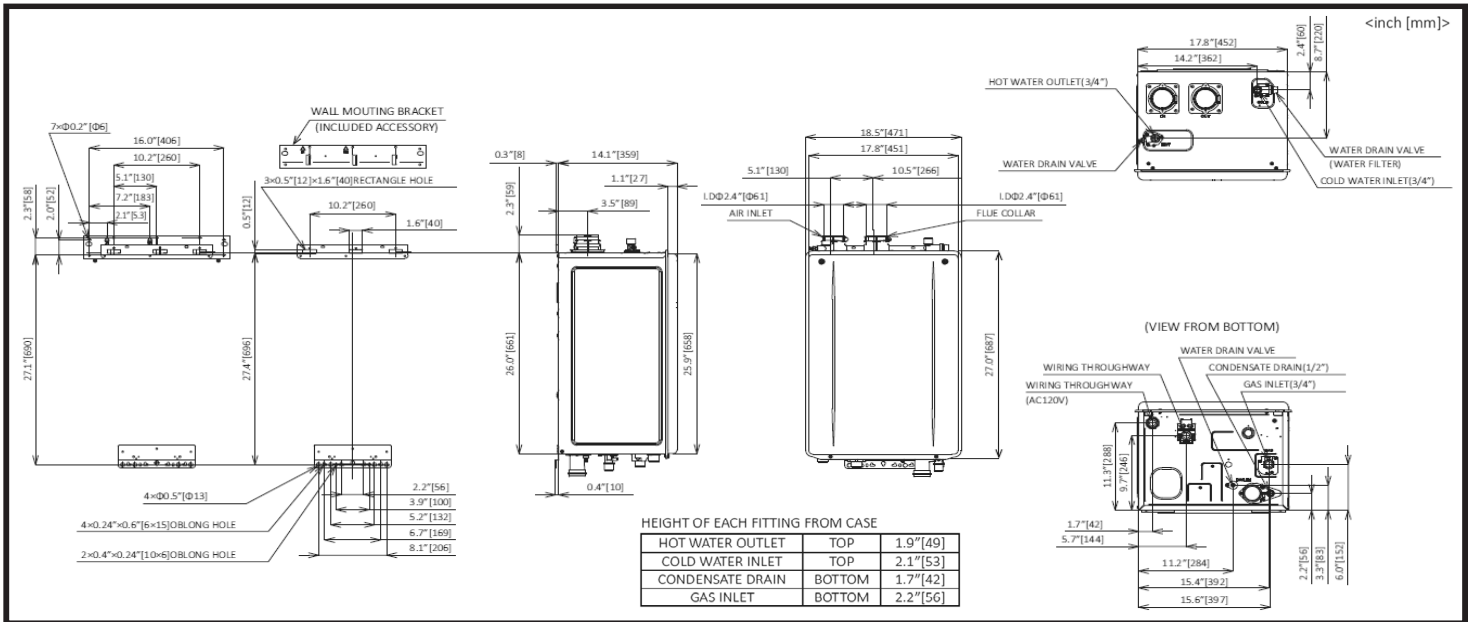

Flow Rate

Temperature Rise (°F)	30	40	45	50	60	70	80	90	100	110	120	130	140
Flow Rate (GPM)	11.1	9.7	8.7	7.8	6.5	5.5	4.8	4.3	3.9	3.5	3.2	3.0	2.8

Pressure Loss Curve

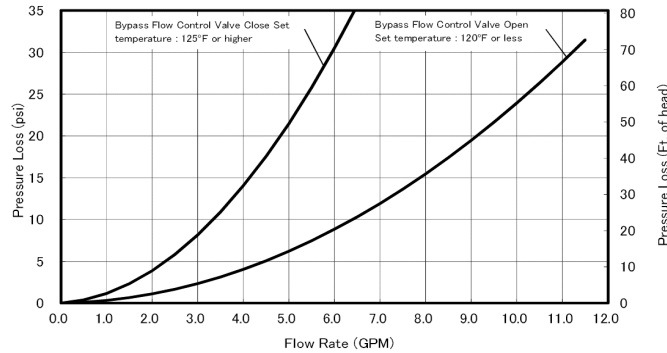

Specifications

Model Name		UT199DV (GQ-C3260WX-FF PB US)	
Weight		70 pounds (32kg)	
Operating Pressure		15 - 150 psi	
Gas Supply Pressure		NG : 3.5" - 10.5" LP : 8.0" - 14.0"	
Water Holding Capacity		0.83 Gallons (3.1 L)	
Gas Connection Size	Water Inlet	3/4" NPT	
	Hot Water Outlet	3/4" NPT	
	Gas Inlet	3/4" NPT	
	Condensate Drain	1/2" Threaded NPT	
Power	Supply	120VAC, 60Hz	
	Consumption	Operation : 96W(NG) / 80W(LP), Freeze Prevention : 114W	
Temperature Settings	Domestic Hot Water	°F Mode	100 - 140°F (In 5°F intervals) (9 Options)
		°C Mode	37 - 48°C (In 1°C intervals), 50 - 60°C (In 5°C intervals) (15 Options)
Materials	Front Cover	Hot-dipped zinc-aluminum-magnesium-alloy-coated steel w/ Polyester Coating	
	Casing	Zincified Steel Plate / Polyester Coating	

