



Model : UT199DV (GQ-C3260WX-FF PB US)

Residential Condensing Gas Water Heater




- **Standard Input** - Gas consumption ranges:
18,000 BTU/h to 199,900 BTU/h
- **Uniform Energy Factor (UEF)** - 0.95
- **Capacity Range** - Flow rates of 0.5 GPM up to 11.1GPM
- **Compact Design** - ANSI Z21.10.3/CSA 4.3 certified design that can be wall-mounted indoors or outdoors using the optional Vent Cap.
- **Heat Exchanger** - Manufactured with high quality stainless steel
- **Venting Options** - Available in Direct Vent model that can use either 2" or 3" Schedule 40 PVC/CPVC, Flexible PP Vent, or installed outdoors with Vent Cap.
- **Top Mount Connection for cold and hot water**
- **Direct Electronic Ignition**
- **Temperature Controls** - Includes remote thermostat that can precisely adjust the output temperature from 100°F to 140°F.
- **Multi-System Capability** - Units can be linked together by using the optional 2-unit Quick Connect for twice the hot water capacity.
- **Compatible with 1/2" gas pipe** - See installation manual.
- **Input Modulating** - Each individual unit 11:1 Turndown Ratio.
Single unit : 18,000 - 199,900 BTU/h
Two units as multi link system (with Quick Connect Cord) : 18,000 - 399,800 BTU/h
- **Safety Devices** - Flame Sensor, Overheat Prevention Device, Lightning Protection Device, Freezing Prevention Device, Condensate Overflow, Fan Rotation Detector
- **18-Year* Limited Heat Exchanger Warranty for Residential Use**
- **5-Year Limited Parts Warranty**
- **Approvals** - CSA, UPC**, NSF, Low NOx Approved by SCAQMD (Rule 1146.2)



* Refer to the Pavilion™ Limited Warranty for complete coverage details at www.paviliontankless.com.
** This product complies with California AB 1953 Low Lead Law and Section 1417(d) of the Safe Drinking Water Act.

- Accessories**
- Quick Connect Cord (Stock Code:1809)
 - Remote Controller Cord 26ft (7.9m) (Stock Code:1810)
 - PVC Concentric Termination - 2" / 3" (Stock Code:1813 / 1813-1)
 - 2" SV Conversion Kit (Stock Code:1814)
 - 2" Bird Screen (Stock Code:1816)
 - 3" Bird Screen (Stock Code:1817)
 - 3" Horizontal Hood Termination (Stock Code:1818)
 - Universal Concentric Vent Kit (Stock Code:1819)
 - Low Profile Termination Kit - 2" / 3" (Stock Code:1820 / 1820-1)
 - Plastic Rain Cap (Stock Code:1821)
 - Outdoor Vent Cap (Stock Code : 1815)
 - Flex Vent 2 in. Conversion Kit (Stock Code : 1823)
 - Flex Vent 2 in. Kit - 25ft / 35 ft (Stock Code : 1824 / 1824-1)
 - Recirculation System (Stock Code: 1826)
 - Neutralizer (Stock Code: 1822)
 - Remote Controller RC-9018M NB (Stock Code: 1825)


Dimensions

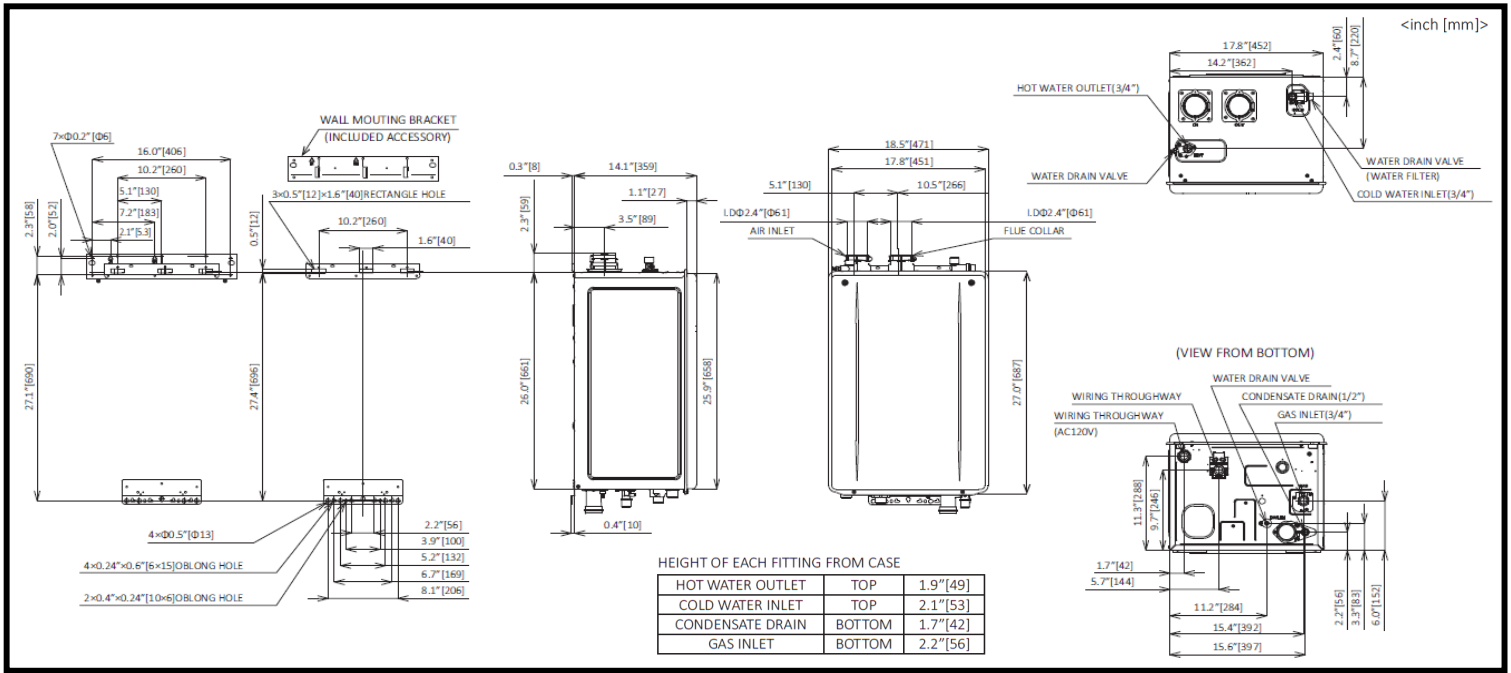

Flow Rate

Temperature Rise (°F)	30	40	45	50	60	70	80	90	100	110	120	130	140
Flow Rate (GPM)	11.1	9.7	8.7	7.8	6.5	5.5	4.8	4.3	3.9	3.5	3.2	3.0	2.8

Pressure Loss Curve

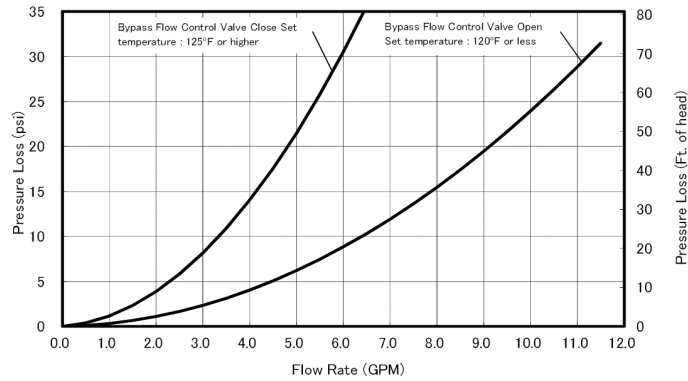

Specifications

Model Name		UT199DV (GQ-C3260WX-FF PB US)	
Weight		70 pounds (32kg)	
Operating Pressure		15 - 150 psi	
Gas Supply Pressure		NG : 3.5" - 10.5" LP : 8.0" - 14.0"	
Water Holding Capacity		0.83 Gallons (3.1 L)	
Gas Connection Size	Water Inlet	3/4" NPT	
	Hot Water Outlet	3/4" NPT	
	Gas Inlet	3/4" NPT	
	Condensate Drain	1/2" Threaded NPT	
Power	Supply	120VAC, 60Hz	
	Consumption	Operation : 96W(NG) / 80W(LP), Freeze Prevention : 114W	
Temperature Settings	Domestic Hot Water	°F Mode	100 - 140°F (In 5°F intervals) (9 Options)
		°C Mode	37 - 48°C (In 1°C intervals), 50 - 60°C (In 5°C intervals) (15 Options)
Materials	Front Cover	Hot-dipped zinc-aluminum-magnesium-alloy-coated steel w/ Polyester Coating	
	Casing	Zincified Steel Plate / Polyester Coating	

PB Heat reserves the right to discontinue, or change at any time, the designs and/or specifications of its products without notice.